



Frequency Range	Mode	ESR	Reflow Solder Condition (260°C)
-----------------	------	-----	---------------------------------

36.00 to 39.99 MHz	Fundamental	150 Ω
40.00 to 47.99 MHz	Fundamental	80 Ω
48.00 to 80.00 MHz	Fundamental	60 Ω

- Only 0.33mm thick
- OTR -40C to +125C Available

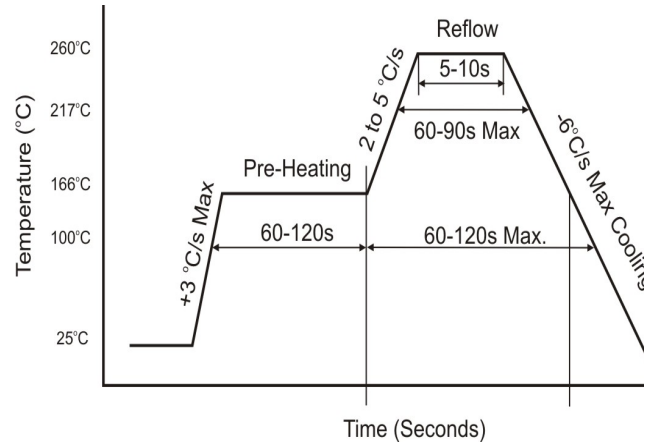

Dimensions

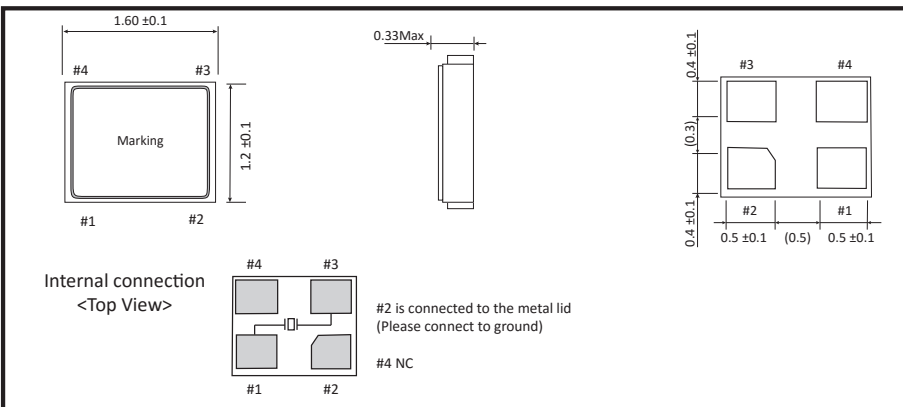

Recommended Solder Pattern

