


Standard Specifications


Part Number	Centre Freq. (MHz)	Insertion Loss (Max.)	Ripple (Max.)	Bandwidth (Min.)	VSWR (in Bandwidth)	Spurious Attenuation (dB) Min.
DFC1575P010	1575.42	≤4dB	≤0.5dB	10 MHz	≤2.0	≥15 (f0-50MHz) ≥19 (f0+50MHz)
DFC1575P002	1575.42	≤3.5dB	≤0.5dB	2 MHz	≤2.0	≥23 (f0-50MHz) ≥18 (f0+50MHz)

Dimensions (mm)

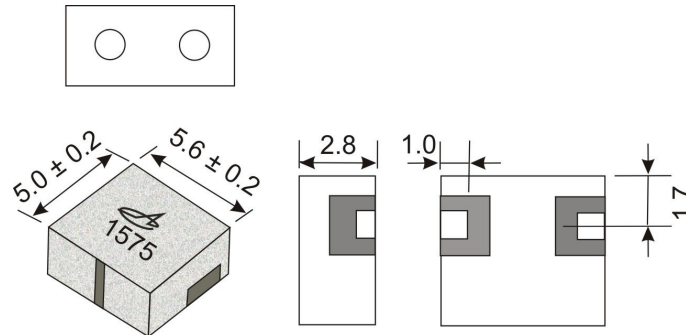

Transmission & Reflection Characteristics


DFC1575P010 Transmission & Reflection

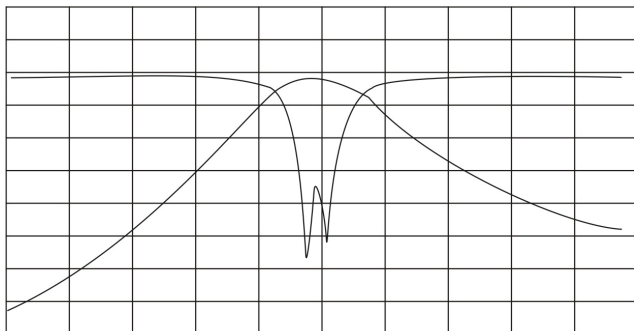

Centre 1575.42 MHz

Span 300MHz

DFC1575P0002 Transmission & Reflection

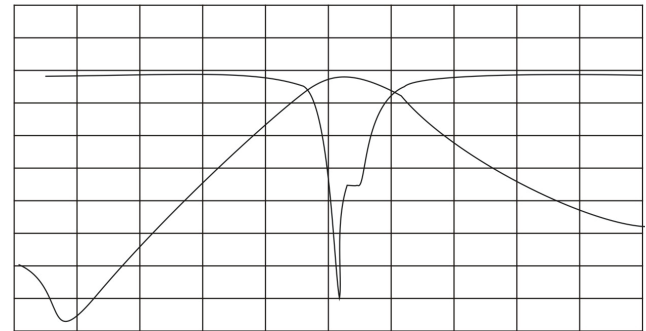

Centre 1575.42 MHz

Span 300MHz